




CARMIX 25 FX



Metalgalante, the Company that invented and developed CARMIX, the No. 1 in the 4x4 Self-Loading Concrete Mixer. Thanks to 40 years of experience, CARMIX represents world-wide the Ideal Solution to produce high-quality cost-effective concrete wherever and whenever needed. From our Venice based factory, thousands of CARMIX have reached our Customers to over 130 Countries matching their utmost expectations.



30020 Noventa di Piave (Venice) Italy
 Tel.+39.042165191 - Fax +39.0421658838
 info@carmix.com
 Skype: carmix.main

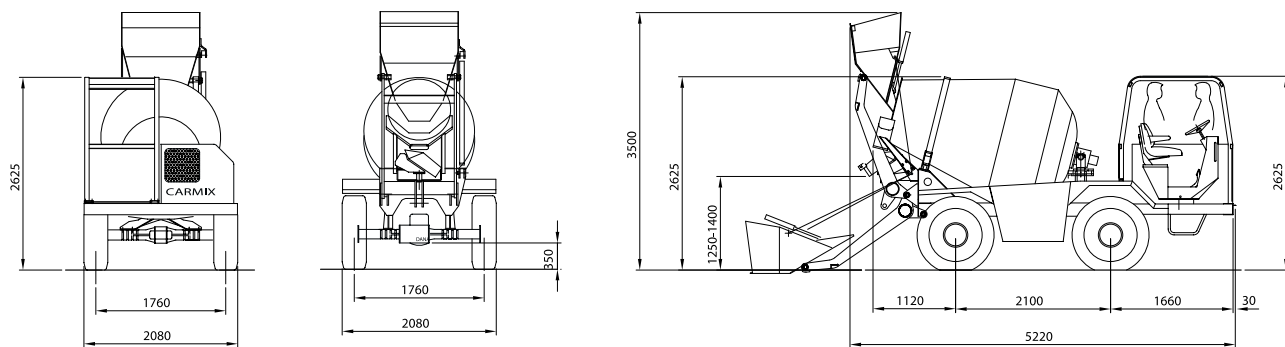

CARMIX 25 FX



carmix.com

EASY & ECONOMIC CONCRETE ANYWHERE





CARMIX 25 FX



CARMIX 25 FX



MIXING UNIT: Drum capacity 3450 liters. Concrete output: 2,5 m3. Double mixing screw, cover for emergency unloading. Mixing and discharging speed independent from r.p.m. of diesel engine. Discharging by reversing drum.



ENGINE: Turbo diesel Perkins 1104 D - 44T, water cooled, 4 cylinders. Power 63 KW (85HP) set at 2200 r.p.m.



TRANSMISSION: Hydrostatic Bosch-Rexroth. Heavy duty differential axles with planetary reducers. Front axle swinging and steering. Rear axle fixed.



SPEED: Working speed from 0 to 10 km/h, road transfer from 0 to 24 km/h. Electric servo control.



DRIVING SEAT: ROPS-FOPS canopy. Reversible seat with automatic inversion of hydraulic steering circuit.



CHASSIS: Steel profile specially engineered for off-road operations.



HYDRAULIC SYSTEM: Three independent circuits. Two variable outlet pumps for hydrostatic transmission and drum rotation. One pump for services. Inlet and outlet filter. Heat exchanger water/oil-air type.



LOADING SHOVEL: Capacity 400 liters, Complete with hydraulic opening gate.



CHUTE: Slewing and hydraulically tilting.



WATER SYSTEM: Self contained. Hydraulic driven water pump. Water meter. Washing outlet.



GRADIENT: Fully loaded 30%



BRAKES: Oil bath disc brakes inside differential axles. Twin independent circuits. Negative hydraulic parking brake.



TYRES: Off-Road industrial type 12.5-20 PR 12.



STEERING: Hydrostatic "Load sensing". Radius internal mm. 2550, external mm. 5100.



ELECTRIC SYSTEM: 12 Volt. 120 Ah battery for electric start and road lighting. Safety battery cutoff.



TANKS: Water 2 x 275 l. Diesel 100 l Hydraulic oil 80 l.



WEIGHT: In running order Kg. 5300.



SAFETY: Machine equipped with checking and block valves for maximum safety of the operator.



CATALOGUES: The machine is equipped with Use and Maintenance and Spare Parts Manuals according to CE regulations.

graphic CARMIX - studio clipart 0421.480750

As result of our policy of continuously developing and improving our product range, all specifications may change without notice.

