

KOMATSU

PW160-7

ENGINE POWER
97,0 kW / 130 HP @ 2.200 rpm

OPERATING WEIGHT
14.200 - 16.590 kg

BUCKET CAPACITY
max. 0,97 m³

PW
160

HYDRAULIC WHEELED EXCAVATOR



PW160-7

WALK-AROUND

The PW160-7 is a rugged, productive, all-European machine. Designed and expressly built for European markets, it delivers productivity, reliability and operator comforts in a robust, environmentally-friendly package. Komatsu's exclusive, on-board, HydraulMind system assists in all operations, providing enhanced machine performance that's always perfectly matched to the task.

High productivity

- High lifting capacity and good stability
- High drawbar pull

Undercarriage

- Designed for high ground clearance
- Virtually zero axle rocking with out-board wet disc system
- Powerful drawbar pull
- Automatic 3-speed travel
- 35 km/h maximum travel speed

Advanced Attachment Control

The PW160-7 can be optionally equipped to handle a wide variety of attachments. The advanced attachment control system features:

- Operator selectable hydraulic flow control
- Adjustable presets for rapid attachment changeover
- Attachment piping options for breaker, clamshell or crusher



Komatsu Tracking System

Track and monitor your machine anytime, anywhere for total peace of mind.

ENGINE POWER
97,0 kW / 130 HP

OPERATING WEIGHT
14.200 - 16.590 kg

BUCKET CAPACITY
max. 0,97 m³

SpaceCab™

- Sealed and pressurised cab with standard climate control
- Low-noise design
- Low-vibration design with viscous cabin damper mounting
- Cab moved forward for better visibility
- Ergonomic control levers
- Seat specially designed for wheeled machines, with exceptional extra comfort

Excellent reliability and durability

- Reliable major components designed and built by Komatsu
- Exceptionally reliable electronic devices

In harmony with the environment

- The economy mode reduces fuel consumption
- Low operating noise
- Designed for easy end-of-life recycling



ecot3
ecology & economy - technology 3

The Komatsu SAA4D107E-1 engine meets EU Stage IIIA and EPA Tier III emission regulations.


EMMS

EMMS (Equipment Management and Monitoring System)

The EMMS is a highly sophisticated system, controlling and monitoring all the excavator functions. The user interface is highly intuitive and provides the operator with easy access to a huge range of functions and operating information.

Four working modes

The PW160-7 is equipped with three working modes: (P, E, B), plus a lifting mode (L). Each mode is designed to match the engine speed, pump speed, and system pressure with the current operating requirement. This provides the flexibility to match equipment performance to the job at hand.

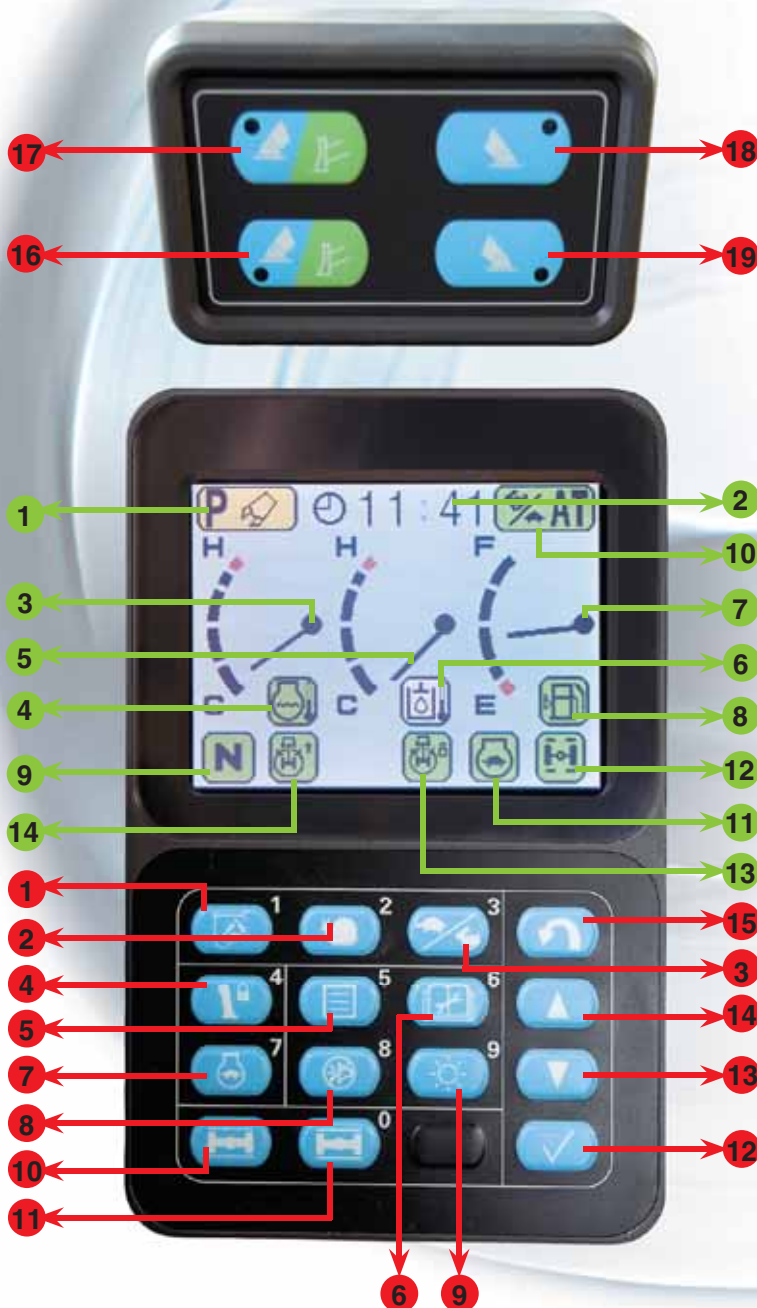

On-screen symbols

- 1 Working mode
- 2 Service meter and clock
- 3 Engine water gauge
- 4 Engine water temperature warning
- 5 Hydraulic oil gauge
- 6 Hydraulic oil temperature warning
- 7 Fuel gauge
- 8 Fuel low level warning
- 9 Travel direction
- 10 Travel mode
- 11 Auto deceleration
- 12 Suspension lock
- 13 Swing lock
- 14 Swing position

Push-button control switches

- 1 Working mode select
- 2 Creep speed
- 3 High/low speed select
- 4 Control lever lock
- 5 Menu select key
- 6 Service menu
- 7 Engine auto deceleration
- 8 Buzzer cancel
- 9 Brightness adjust
- 10 Suspension auto lock
- 11 Suspension lock
- 12 Accept key
- 13 Scroll down
- 14 Scroll up
- 15 Undo switch
- 16 Rear left outrigger/blade
- 17 Front left outrigger/blade
- 18 Front right outrigger
- 19 Rear right outrigger

Power mode

For maximum power and fast cycle times. Normally used for heavy operations such as hard digging and loading. This mode allows access to the 'PowerMax' function to temporarily increase the digging force by 7% for added power in tough situations.

Economy mode

The environmentally-friendly mode. For running more quietly during operations at night and/or in urban areas. Fuel consumption and exhaust emissions are reduced.


Breaker mode

Delivers optimal hydraulic pressure, flow and engine RPMs for powerful breaker operations.

Lifting mode

Increases the lifting capacity 7% by raising the hydraulic pressure. This mode supports safe lifting operations.

Working mode	Application	Advantage
P	Power mode	<ul style="list-style-type: none"> • Maximum production/power • Fast cycle times
E	Economy mode	<ul style="list-style-type: none"> • Excellent fuel economy
B	Breaker mode	<ul style="list-style-type: none"> • Optimum engine RPMs and hydraulic flow
L	Lifting mode	<ul style="list-style-type: none"> • Hydraulic pressure has been increased by 7%



Hydraulic flow general adjustment screen in B (breaker) mode



Fine tune hydraulic flow adjustment screen in B (breaker) mode



Fine tune hydraulic flow adjustment screen in P (power) or E (economy) mode



Password screen

Easy to see and easy to use

Superb recognition colour LCD screens for each mode. Letters and numbers are combined with colour images for exceptionally clear and easy-to-read information. The high-resolution screen is easy to read in bright sunlight and in all lighting conditions.

Automatic three-speed travel

The travel speed is automatically shifted from high to low speed, according to the ground conditions.

	High	Low	Auto	Creep
Travel speed	35 km/h	10 km/h	0 - 35 km/h	2,0 km/h

Fingertip hydraulic pump oil flow adjustment

From the LCD monitor, you can automatically select the optimal hydraulic pump oil flow for breaking, crushing, and other operations in the B, P or E modes. Also, when simultaneously operating with attachments and work equipment, the flow to the attachment is reduced automatically, thus delivering a smooth movement of the work equipment.

Password protection

Prevents unauthorised machine use or transport. The engine cannot be started without your four-digit use or password.

For total security, the battery is connected directly to the starter motor. Both the starter and the engine need the password.

The password can be activated and deactivated upon request.

WORKING ENVIRONMENT

PW160-7's cab interior is spacious and provides a comfortable working environment...

SpaceCab™

Comfortable cab

The new PW160-7 inner cab volume is 14% greater than the Dash 6 models, offering an exceptionally comfortable operating environment. The large cab enables the seat, with headrest, to be reclined to horizontal.

Pressurised cab


The standard-equipped climate control, air filter and a higher internal air pressure resist dust entry into the cab.

Low-noise design

Noise levels are substantially reduced; engine noise as well as swing and hydraulics operations noise.

Cab damper mounting for low vibration levels

PW160-7 uses a new and improved viscous damping cab mount system that incorporates a longer stroke plus an added spring. The new cab damper mounting, combined with strengthened left and right-side decks, aids the reduction of vibrations to the operator's seat.

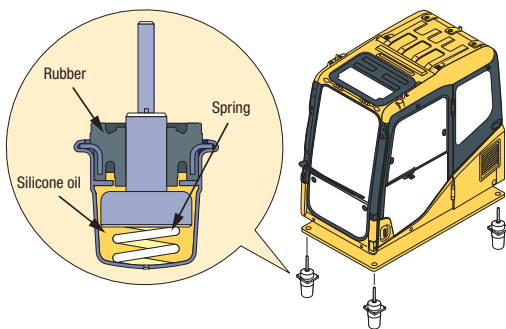

Outer air filter

Easy removal/installation of the air conditioner filter element, without tools facilitates easier cleaning.



Large sun roof with integrated sun shade



12-Volt power supply and (optional) radio cassette



Climate control



Tiltable steering wheel with several functions; wiper control, indicator, horn, and head lights

Safety features

Multi-position controls

The multi-position, proportional pressure control levers allow the operator to work in comfort whilst maintaining precise control. A double-slide mechanism allows the seat and controllers to move together, or independently, allowing the operator to position the controllers for maximum productivity and comfort.



Hot and cool box



Joysticks with proportional control button for attachments



Seat sliding range: 340 mm



Defroster/demister

Improved, wide visibility

The right side window pillar has been removed and the rear pillar reshaped to provide greater visibility. Blind spots have been decreased by 34%.

Pump/engine room partition

This prevents hydraulic oil from spraying onto the engine to reduce the risk of fire.

Thermal and fan guards

Are placed around high-temperature parts of the engine.

Steps with non-skid surface and large handrail

Steps with non-slip surfacing ensure safer maintenance.

Thermal guard



Non-slip sheet




Large handrail for safe access




FLEXIBILITY

ARMS



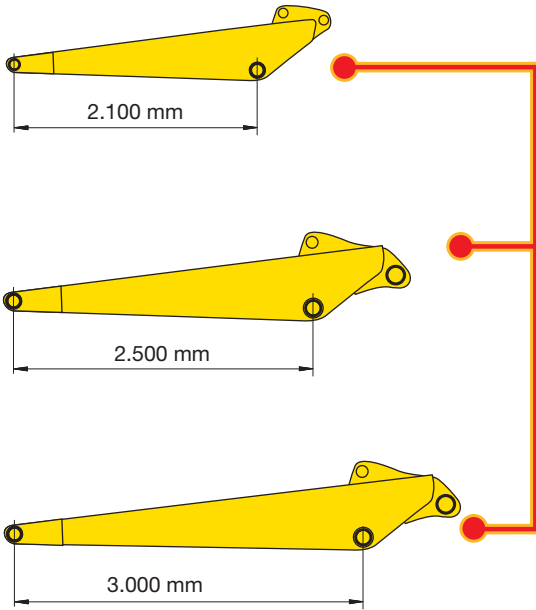


BOOMS

Mono boom

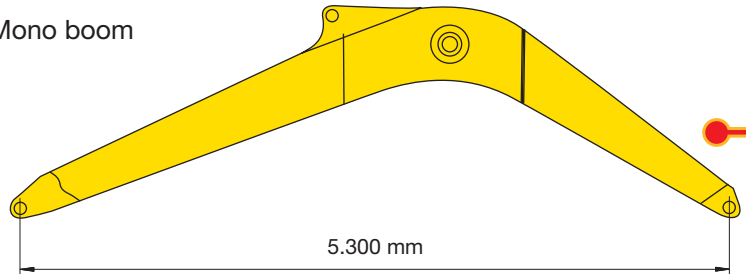

Two-piece boom

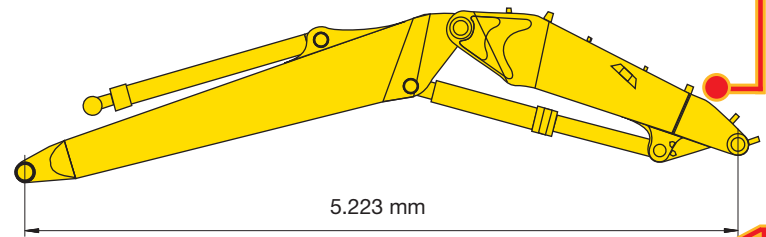

Additional hydraulic circuits



A 2-way additional hydraulic circuit, electrically controlled from the wrist control levers, is fitted as standard.



Outriggers

Independently controlled outriggers are optionally available on both, the front and rear of the machine. The cylinder protections are standard on the outriggers.

The PW160-7 can be specified with an enormous range of work equipment and undercarriage attachments to meet the needs of almost any application.



Attachments commonality & functionality

The stabilizer and dozer blade are interchangeable, and therefore can be attached on the front or rear of the chassis. The stabilizer and dozer blade are controllable from the monitor panel. The monitor panel has four buttons that allow individual attachment operation as well as collective operation.



Toolbox
Tough, secure toolbox, integrated in the mudguards. Optionally fitted on both sides of the undercarriage.



Dozer blade
A parallel blade is available with standard cylinders protector for both the front and rear of the machine.
Dimensions: 2.550 mm x 520 mm

EASY OPERATION

As well as operating the standard work equipment movements, the RH wrist control lever is also used to operate the undercarriage. When used in conjunction with the selection switch on the control panel, full independent control of outriggers and dozer blade is immediately available. This feature, together with the automatic axle lock, enables the machine to be moved, stabilized and operated extremely quickly.

Travel control

A rock button is installed on the right hand lever, it controls the travel operation into forward, neutral and rear.



Clamshell control

Anti-clock wise clamshell rotation.



Undercarriage attachment control

After a single touch, the lever can be used to precisely operate the selected undercarriage attachment. After operating the undercarriage attachments, a single touch reverts the lever into standard boom operation.

Breaker control

Used for breaker operation when B mode is selected.



PRODUCTIVITY FEATURES



Safe and precise lifting

PW160-7's stability is one of the best in its class. The machine is equipped with boom safety valves and overload caution as standard. This combined with the control of HydrauMind and the power of the lifting mode, gives incredible safe and precise lifting performance.

Example: The over-front lifting capacity (reach 4,5 m over front, height 1,5 m) has a capacity of 7,9 tonnes (dozer blade down).

Improved fuel consumption

With its newly developed Komatsu ECOT3 engine, the PW160-7 significantly reduces hourly fuel consumption through highly efficient techniques for matching the engine and hydraulic unit. The Komatsu SAA4D107E-1 engine meets EPA Tier III, and EU Stage IIIA emissions regulations and reduces NOx emissions.

PowerMax function

PowerMax can be selected by depressing a joystick button for an instant burst of power to help break through tough digging situations. The PowerMax function is available in the P and E working mode.

Bucket digging force*: 10.400 kg

Arm crowd force*: 7.740 kg

* Measured with PowerMax function, 2.100 mm arm and ISO rating



Superb visibility

Excellent all-round visibility is provided by large panoramic windows. Front visibility is further improved by the use of the Komatsu patented wiper system. When not in use the wiper parks on the cab frame itself with no contact with the front window. As well as giving excellent visibility, this systems avoids the need to disconnect the wiper before lifting the front window. The standard new plexiglas roof with sun visor gives the operator a better view of overhead obstacles and machine operations. It also allows more natural light to illuminate the cab's interior.

REVOLUTIONARY MACHINE MANAGEMENT



The Komatsu Tracking System, KOMTRAX™, provides a revolutionary new way to monitor your equipment, anytime, anywhere. It lets you pin-point the precise location of your machines and obtain real-time machine data. Using GPS location and communication satellite technology, it's designed to be future proof and will meet your demands today and tomorrow.

Komtrax will help you to answer the three most important questions you have about your machine:

- Is the machine making money
- Is the machine safe
- Is the machine in good health

For more details, please ask your distributor for a copy of the Komtrax brochure.



KOMTRAX™ server

Check machine location



Customer



Check service meter



Annual working hour record

Year	Month	Working Hours	Idle Hours	Total Hours
2010	Jan	100	50	150
2010	Feb	120	60	180
2010	Mar	150	75	225
2010	Apr	180	90	270
2010	May	200	100	300
2010	Jun	220	110	330
2010	Jul	250	125	375
2010	Aug	280	140	420
2010	Sep	300	150	450
2010	Oct	320	160	480
2010	Nov	350	175	525
2010	Dec	380	190	570
2010	Total	2400	1200	3600

Caution and periodic maintenance

Item	Due Date	Status	Remarks
Oil Change	2010-01-15	Completed	Oil level checked and topped up.
Filter Change	2010-02-01	Pending	Filter needs to be replaced.
Inspection	2010-03-15	Completed	General inspection passed.
Hydraulic Oil	2010-04-01	Pending	Hydraulic oil level needs to be checked.
Brake Pads	2010-05-15	Completed	Brake pads replaced.
Wash	2010-06-01	Completed	Machine washed and cleaned.
Grease	2010-07-15	Pending	Grease needs to be applied to joints.
Inspection	2010-08-01	Completed	Inspection completed.
Oil Change	2010-09-15	Pending	Oil change scheduled.
Filter Change	2010-10-01	Pending	Filter change scheduled.
Inspection	2010-11-15	Completed	Inspection completed.
Oil Change	2010-12-01	Pending	Oil change scheduled.
Filter Change	2011-01-15	Pending	Filter change scheduled.

Working record (fuel level, hours etc.)

Date	Working Hours	Fuel Level	Engine Hours	Idle Hours
2010-01-01	100	100	100	0
2010-01-15	120	120	120	0
2010-02-01	150	150	150	0
2010-02-15	180	180	180	0
2010-03-01	200	200	200	0
2010-03-15	220	220	220	0
2010-04-01	250	250	250	0
2010-04-15	280	280	280	0
2010-05-01	300	300	300	0
2010-05-15	320	320	320	0
2010-06-01	350	350	350	0
2010-06-15	380	380	380	0
2010-07-01	400	400	400	0
2010-07-15	420	420	420	0
2010-08-01	450	450	450	0
2010-08-15	480	480	480	0
2010-09-01	500	500	500	0
2010-09-15	520	520	520	0
2010-10-01	550	550	550	0
2010-10-15	580	580	580	0
2010-11-01	600	600	600	0
2010-11-15	620	620	620	0
2010-12-01	650	650	650	0
2010-12-15	680	680	680	0
2010-Total	6800	6800	6800	0

There are certain countries where KOMTRAX™ is not yet available, please contact your distributor when you want to activate the system. Komtrax will not operate if the satellite signal is blocked or obscured.

MAINTENANCE FEATURES

Easy maintenance

Komatsu designed the PW160-7 to have easy service access. By doing this, routine maintenance and servicing are less likely to be skipped. This can mean a reduction in costly downtime later on. Here are some of the many service features found on the PW160-7:

Easy access to the engine oil filter and fuel drain valve

The engine oil filter and fuel drain valve are mounted remotely to improve accessibility.

Side-by-side cooling

The oil cooler and radiator are installed side by side. As a result, it is very easy to clean the radiator, etc. In addition, the operator can remove and install the aftercooler, radiator and oil cooler in a short time.

Water separator

This is standard equipment which removes any water that has become mixed with the fuel, preventing fuel system damage.



Designed and built for strength

Using the latest computer aided design techniques and exhaustive testing, the boom and arm designs have been optimised for strength and durability.

The highly automated manufacturing process uses the very latest equipment and quality control techniques. Critical welding is carried out by robots to ensure an extremely high quality and consistent product.

Precision engineered pin and bush system. The key work equipment joints use a chrome plated pin and bronze bushing system to provide minimal play and extended durability.

SPECIFICATIONS



ENGINE

Model	Komatsu SAA4D107E-1
Type	Common rail direct injection, water-cooled, emissionised, turbocharged, after-cooled diesel
Engine power	
at rated engine speed	2.200 rpm
ISO 14396	97,0 kW/130 HP
ISO 9249 (net engine power)	90,0 kW/121 HP
No. of cylinders	4
Bore x stroke	107 x 124 mm
Displacement	4,5 ltr
Batteries	2 x 12 V/120 Ah
Alternator	24 V/60 A
Starter motor	24 V/4,5 kW
Air filter type	Double element type with monitor panel dust indicator and auto dust evacuator
Cooling	Suction type cooling fan



HYDRAULIC SYSTEM

Type	HydrauMind. Closed-centre system with load sensing and pressure compensation valves
Additional circuits	Depending on the specification up to 2 additional proportional control & quick coupler circuits can be installed
Main pump	Variable displacement piston pump supplying boom, arm, bucket, swing and travel circuits
Maximum pump flow	308 ltr/min
Relief valve settings	
Implement	380 bar
Travel	420 bar
Swing	295 bar
Pilot circuit	36 bar



COOLANT AND LUBRICANT CAPACITY (REFILLING)

Fuel tank	300 ltr
Radiator	16 ltr
Engine oil	17 ltr
Swing drive	4,5 ltr
Hydraulic tank	166 ltr
Transmission	4,85 ltr
Front differential	10,5 ltr
Rear differential	9,5 ltr
Front axle hub	2,5 ltr
Rear axle hub	2,0 ltr
Swing pinion grease bath amount	9,0 ltr



STEERING SYSTEM

Steering control	Hydraulic steering system supplied from a separate gear pump and controlled through LS orbitrol & priority valves.
Minimum turning radius	6.790 mm (to center of outer wheel)



SWING SYSTEM

Type	Axial piston motor driving through planetary double reduction gearbox
Swing lock	Electrically actuated wet multi-disc brake integrated into swing motor.
Swing speed	0 - 11 rpm
Swing torque	41 kNm



TRANSMISSION

Type	Fully automatic power shift transmission with permanent 4 wheel drive
Travel motors	One variable displacement axial piston motor
Maximum pressure	380 bar
Travel modes	3 travel modes:
Max. travel speeds	
Hi / Lo / Creep	35 / 10 / 2,0 km/h
A max. speed restriction of 20 km/h is available as an option.	
Maximum drawbar pull	9.750 kg
Front axle load	Lower than 6.100 kg
Rear axle load	Lower than 9.800 kg
Axle oscillation	10° Lockable in any position from the operator cab.



BRAKE SYSTEM

Type	Dual circuit hydraulic braking system supplied from a separate gear pump.
Service brakes	Pedal actuated wet multi-disc brakes integrated into the axle hubs.
Parking brake	Electrically actuated wet multi-disc "spring actuation hydraulic release" brake integrated into the transmission.



ENVIRONMENT

Engine emissions	Fully complies with EU Stage IIIA and EPA Tier III exhaust emission regulations
Noise levels	
LwA external	101 dB(A) (2000/14/EC Stage II)
LpA operator ear	71 dB(A) (ISO 6396 dynamic test)
Vibration levels (EN 12096:1997)*	
Hand/arm	≤ 2,5 m/s ² (uncertainty K = 0,495 m/s ²)
Body	≤ 0,5 m/s ² (uncertainty K = 0,16 m/s ²)
* for the purpose of risk assessment under directive 2002/44/EC, please refer to ISO/TR 25398:2006.	



OPERATING WEIGHT (APPR.)

Operating weight, including specified work equipment, 2.500 mm arm, operator, lubricant, coolant, full fuel tank and the standard equipment. Weights are without bucket.

UNDERCARRIAGE ATTACHMENT TYPE	MONO BOOM	TWO-PIECE BOOM
Without	14.200 kg	14.590 kg
Rear blade	14.950 kg	15.340 kg
Rear outrigger	15.200 kg	15.590 kg
2 outriggers + blade	15.950 kg	16.340 kg
4 outriggers	16.200 kg	16.590 kg



BUCKET OPTIONS & DIGGING FORCES

Specifications and equipment may vary according to regional availability.

BUCKET AND ARM COMBINATIONS					
Bucket			Arm length		
Width	Capacity (SAE)	Weight	2.100 mm	2.500 mm	3.000 mm
400 mm	0,20 m ³	270 kg	○	○	○
450 mm	0,27 m ³	300 kg	○	○	○
600 mm	0,41 m ³	420 kg	○	○	○
700 mm	0,48 m ³	445 kg	○	○	○
800 mm	0,55 m ³	460 kg	○	○	○
900 mm	0,62 m ³	495 kg	○	○	○
1.000 mm	0,69 m ³	530 kg	○	○	○
1.100 mm	0,76 m ³	550 kg	○	□	□
1.200 mm	0,83 m ³	575 kg	□	□	□
1.300 mm	0,90 m ³	605 kg	□	△	△
1.400 mm	0,97 m ³	630 kg	△	△	△


Please consult with your distributor for the correct selection of buckets and attachments to suit the application. The recommendations are given as a guide only, based on typical operating conditions.

- Material weight up to 1,8 t/m³
- Material weight up to 1,5 t/m³
- △ Material weight up to 1,2 t/m³



BUCKET AND ARM FORCE			
Arm length	2.100 mm	2.500 mm	3.000 mm
Bucket digging force	9.700 kg	9.700 kg	9.700 kg
Bucket digging force at PowerMax	10.400 kg	10.400 kg	10.400 kg
Arm crowd force	7.260 kg	6.100 kg	5.080 kg
Arm crowd force at PowerMax	7.740 kg	6.500 kg	5.420 kg

DIMENSIONS

MONO BOOM

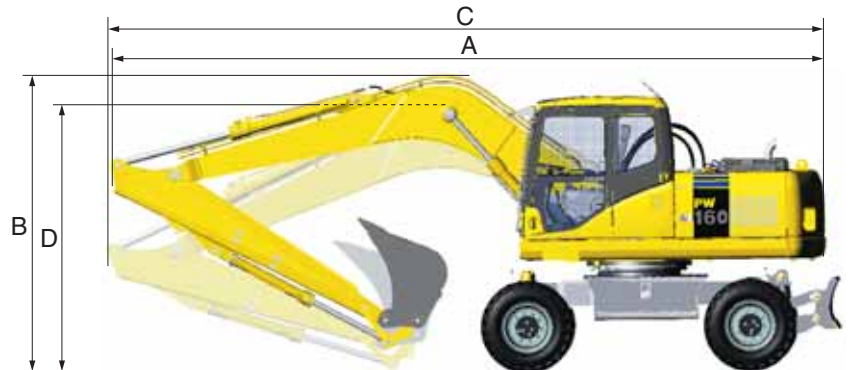

TWO-PIECE BOOM

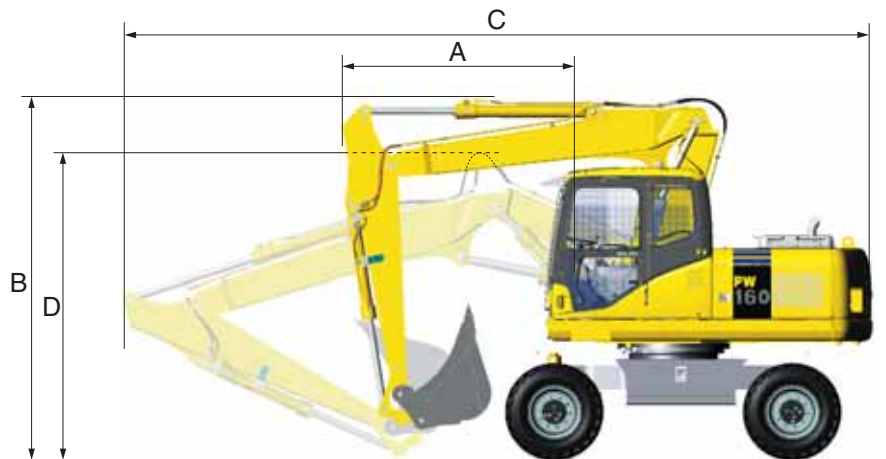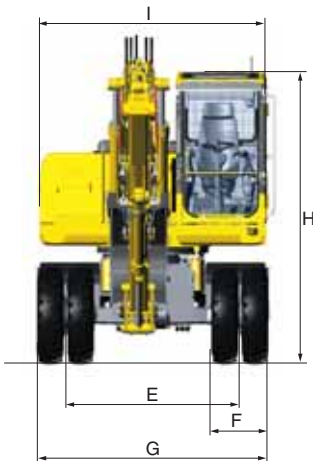


DIMENSIONS	
E	1.915 mm
F	625 mm
G	2.540 mm
H	3.200 mm
I	2.490 mm

MONO BOOM				
Arm	Driving position		Transport position	
	A	B	C	D
2,1 m	8.290 mm	3.500 mm	8.330 mm	3.185 mm
2,5 m	8.290 mm	3.500 mm	8.345 mm	3.235 mm
3,0 m	8.045 mm	3.975 mm	8.365 mm	3.415 mm


TWO-PIECE BOOM				
Arm	Driving position		Transport position	
	A	B	C	D
2,1 m	2.575 mm	3.975 mm	8.225 mm	3.240 mm
2,5 m	2.595 mm	3.975 mm	8.200 mm	3.350 mm
3,0 m	2.665 mm	3.975 mm	8.120 mm	3.565 mm

DIMENSIONS & UNDERCARRIAGE

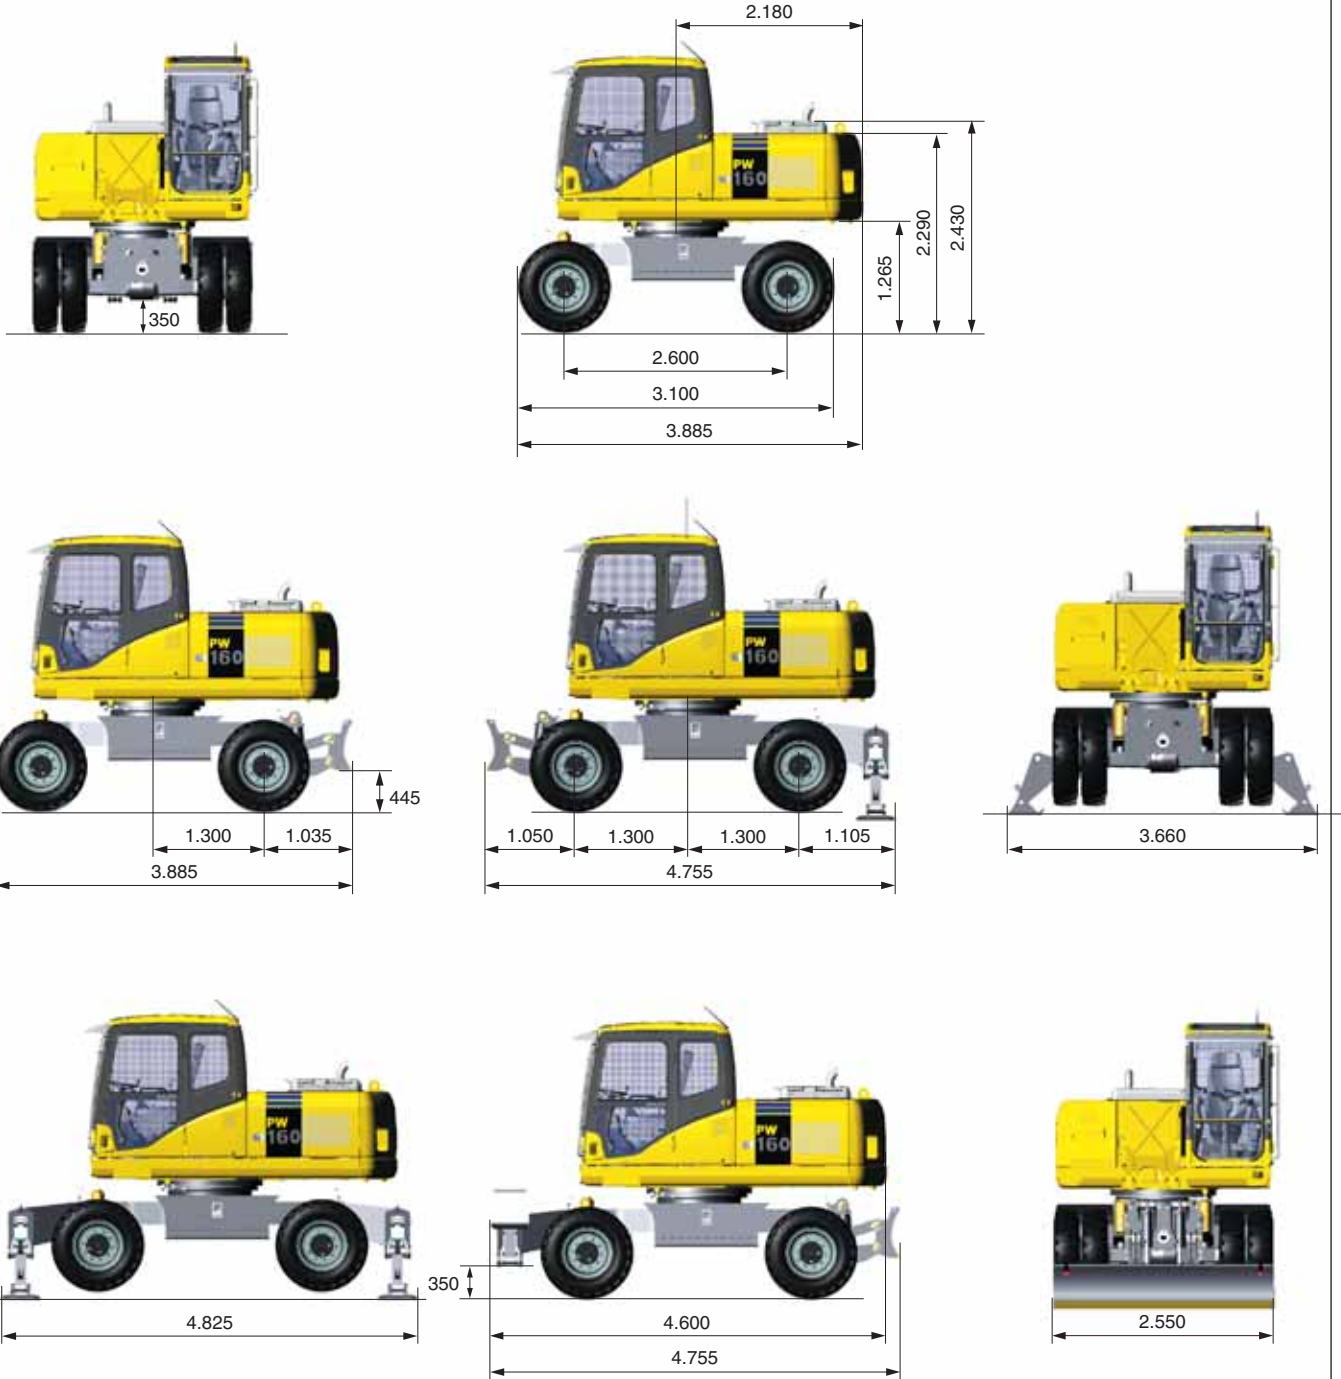


WORKING RANGE

MONO BOOM

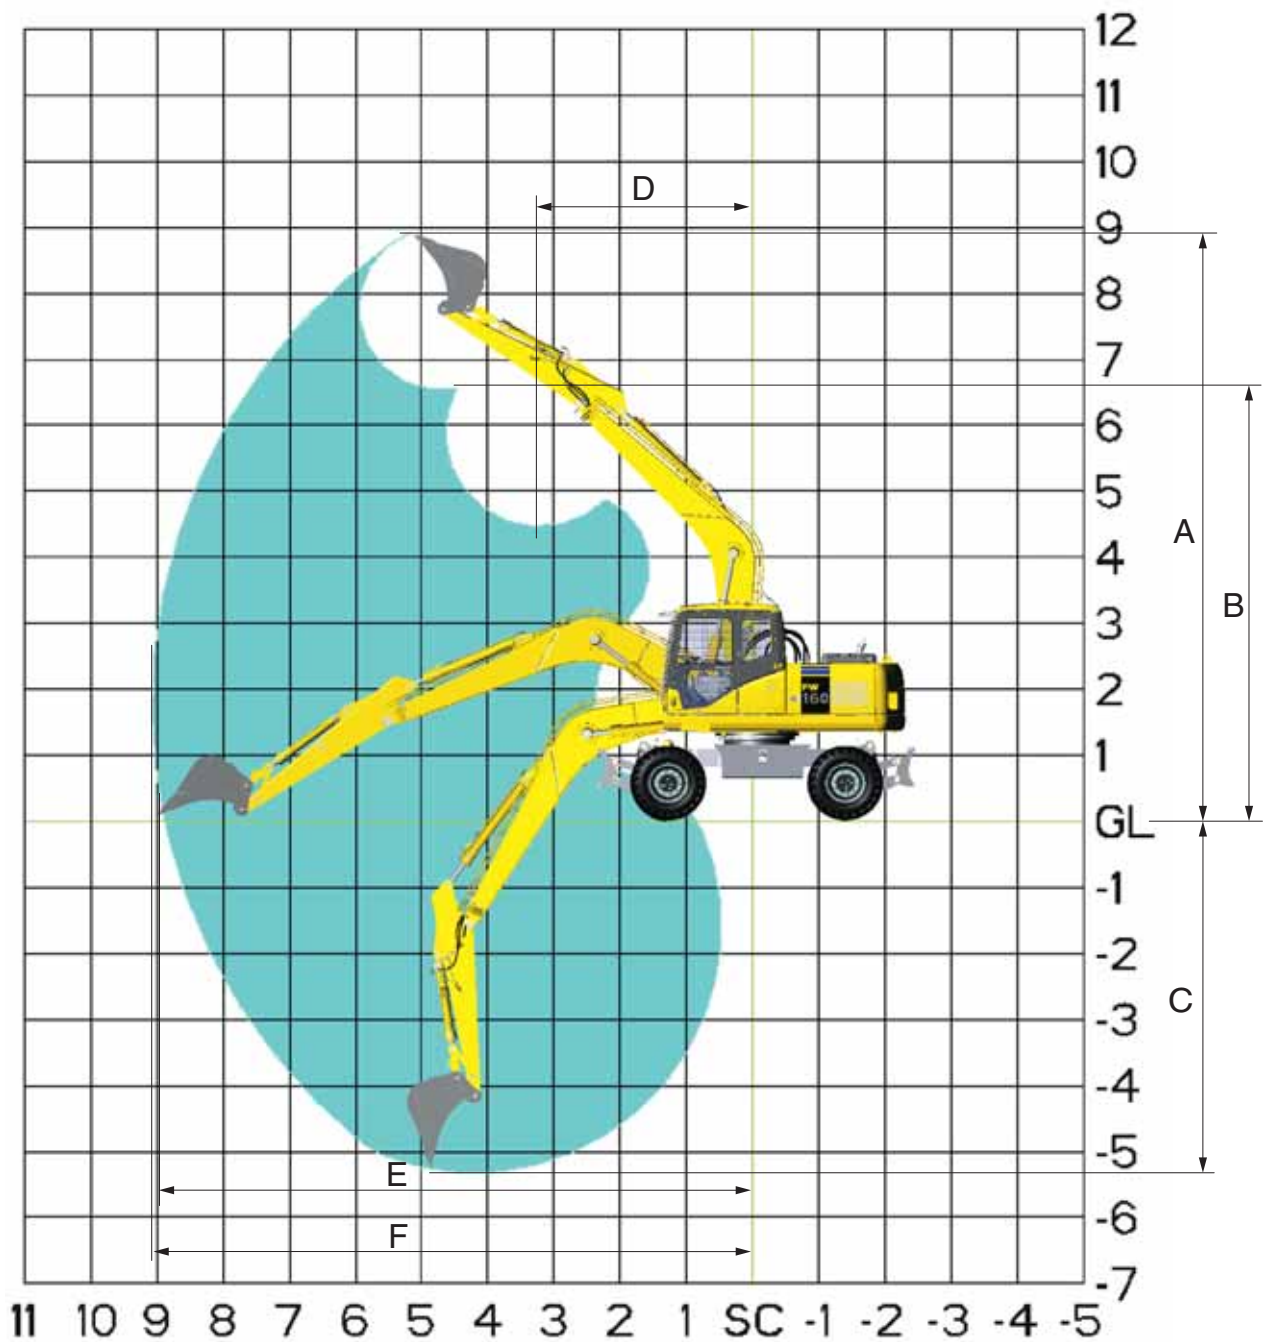

ARM LENGTH		2.100 mm	2.500 mm	3.000 mm
A	Max. digging height	8.730 mm	8.930 mm	9.285 mm
B	Max. dumping height	6.335 mm	6.555 mm	6.911 mm
C	Max. digging depth	4.925 mm	5.320 mm	5.600 mm
D	Min. swing radius	3.205 mm	3.160 mm	3.180 mm
E	Max. digging reach at ground level	8.620 mm	8.885 mm	9.315 mm
F	Max. digging reach	8.640 mm	9.070 mm	9.485 mm


TWO-PIECE BOOM

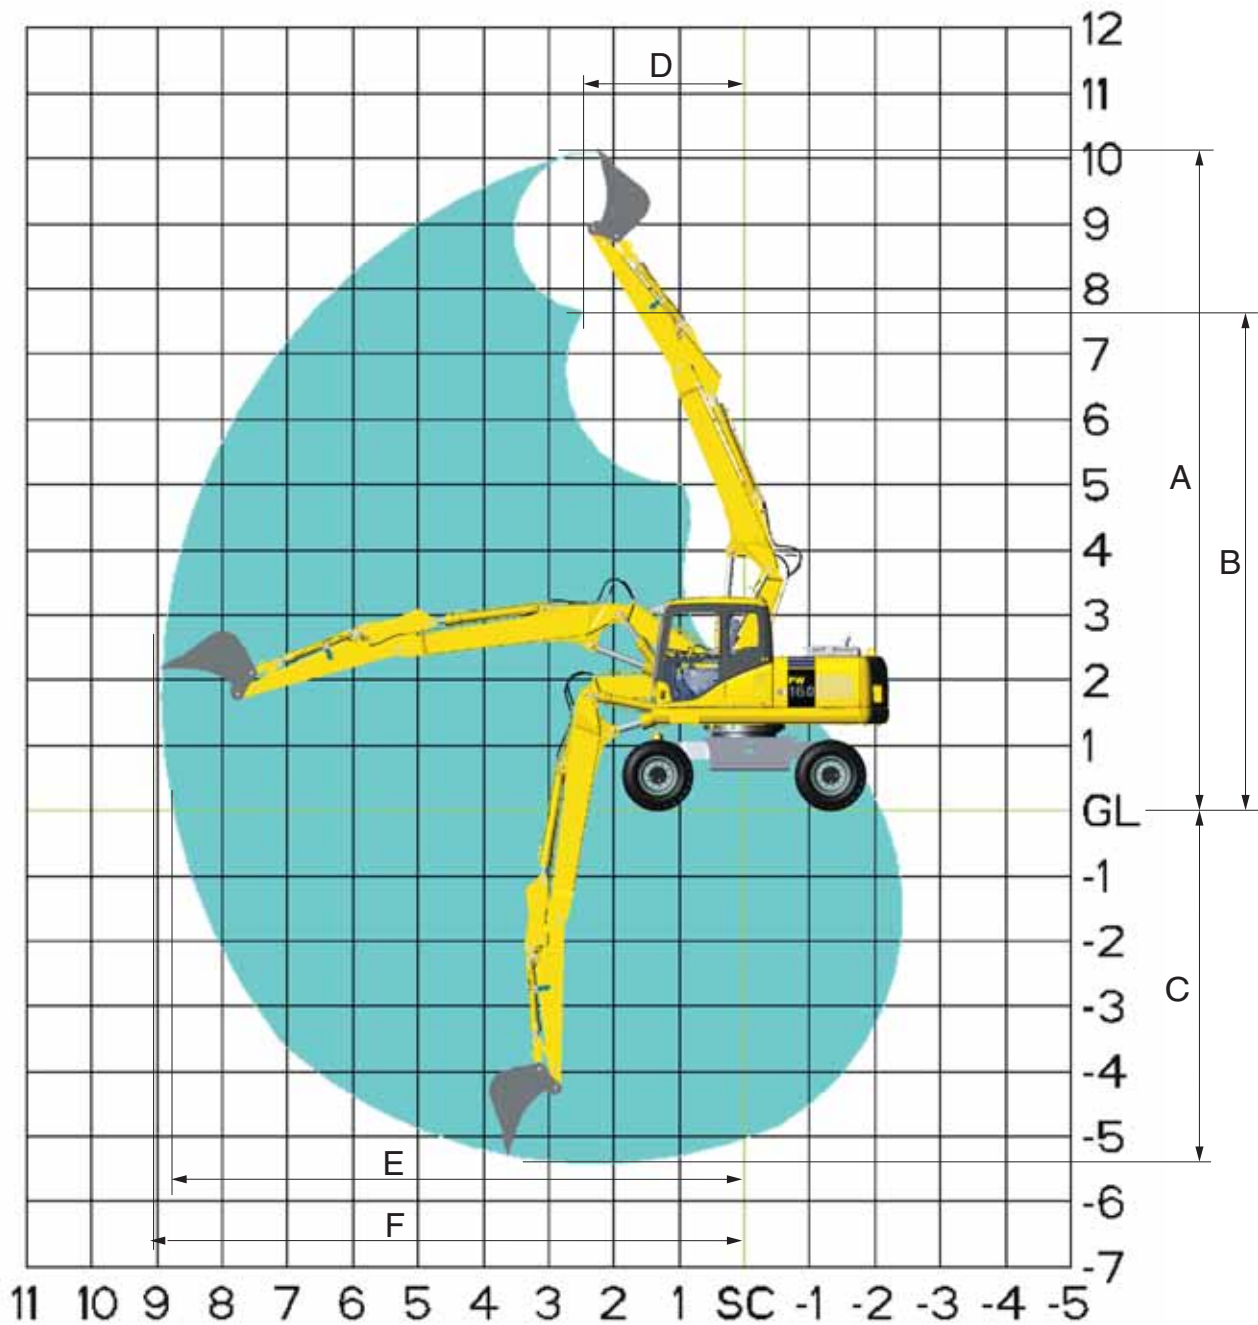


ARM LENGTH		2.100 mm	2.500 mm	3.000 mm
A	Max. digging height	9.745 mm	10.118 mm	10.575 mm
B	Max. dumping height	7.285 mm	7.655 mm	8.117 mm
C	Max. digging depth	4.960 mm	5.465 mm	5.770 mm
D	Min. swing radius	2.215 mm	2.385 mm	2.590 mm
E	Max. digging reach at ground level	8.310 mm	8.745 mm	9.225 mm
F	Max. digging reach	8.505 mm	8.930 mm	9.410 mm

LIFTING CAPACITY

MONO BOOM

Arm length	A	⊗		7,5 m		6,0 m		4,5 m		3,0 m			
		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		
 Without stabilizer	2,1 m	7,5 m	kg	*2.450	*2.450								
		6,0 m	kg	*2.100	*1.800		3.150	2.200					
		4,5 m	kg	*1.950	1.450		3.100	2.150	5.050	3.500			
		3,0 m	kg	1.900	1.250	2.050	1.350	2.950	2.050	4.700	3.200		
		1,5 m	kg	1.850	1.200	2.000	1.300	2.850	1.900	4.350	2.900		
		0,0 m	kg	1.900	1.250	1.950	1.250	2.750	1.800	4.200	2.750		
	2,5 m	-1,5 m	kg	2.100	1.400			2.700	1.750	4.150	2.700	*6.900	5.000
		-3,0 m	kg	2.700	1.800			2.750	1.850	4.200	2.750	*6.550	5.150
		7,5 m	kg	*1.800	*1.800								
		6,0 m	kg	*1.600	*1.600			3.150	2.200				
		4,5 m	kg	*1.550	1.350	*2.000	1.400	3.100	2.150				
		3,0 m	kg	*1.600	1.150	2.050	1.350	3.000	2.050	4.750	3.250	9.500	6.050
3,0 m	1,5 m	kg	*1.700	1.100	1.950	1.300	2.850	1.900	4.450	2.950			
	0,0 m	kg	1.750	1.150	1.900	1.250	2.750	1.800	4.250	2.750	*4.400	*4.400	
	-1,5 m	kg	1.950	1.250			2.700	1.750	4.150	2.700	*7.100	5.050	
	-3,0 m	kg	2.400	1.600			2.700	1.800	4.200	2.750	*7.550	5.150	
	7,5 m	kg	*1.450	*1.450			*2.350	2.150					
	6,0 m	kg	*1.300	*1.300	*1.450	1.350	*2.900	2.200					





- A – Reach from swing center
- B – Bucket hook height
- C – Lifting capacities, including bucket (495 kg), bucket linkage (120 kg) and bucket cylinder (109 kg)

- ⊗ – Rating over front
- ⊗ – Rating over side
- ⊗ – Rating at maximum reach



When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.


* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE Standard No. J1097. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

 Front or rear blade	2,1 m	7,5 m	kg	*2.450	*2.450								
		6,0 m	kg	*2.100	*2.100		*3.750	2.600					
		4,5 m	kg	*1.950	1.750		*4.700	2.550	*5.250	4.150			
		3,0 m	kg	*1.950	1.550	*3.350	1.650	*5.100	2.450	*6.700	3.800		
		1,5 m	kg	*2.050	1.500	4.000	1.600	*5.400	2.300	*7.500	3.500		
		0,0 m	kg	*2.300	1.500	*3.450	1.550	*5.400	2.200	*7.450	3.350		
	2,5 m	-1,5 m	kg	*2.750	1.700			*4.850	2.200	*6.650	3.300	*6.900	6.250
		-3,0 m	kg	*2.900	2.200			*3.200	2.250	*5.050	3.350	*6.550	6.400
		7,5 m	kg	*1.800	*1.800								
		6,0 m	kg	*1.600	*1.600			*3.200	2.600				
		4,5 m	kg	*1.550	*1.550	*2.000	1.700	*4.100	2.550				
		3,0 m	kg	*1.600	1.450	*3.300	1.650	*4.900	2.450	*6.400	3.900	*10.050	7.350
3,0 m	1,5 m	kg	*1.700	1.400	4.000	1.600	*5.300	2.300	*7.350	3.600			
	0,0 m	kg	*1.950	1.400	3.950	1.550	*5.400	2.200	*7.550	3.400	*4.400	*4.400	
	-1,5 m	kg	*2.400	1.600			*5.050	2.150	*6.950	3.300	*7.100	6.250	
	-3,0 m	kg	*3.150	1.950			*3.850	2.200	*5.550	3.350	*7.550	6.400	
	7,5 m	kg	*1.450	*1.450			*2.350	*2.350					
	6,0 m	kg	*1.300	*1.300	*1.450	*1.450	*2.900	2.650					

 Rear outrigger	2,1 m	7,5 m	kg	*2.450	*2.450								
		6,0 m	kg	*2.100	*2.100		*3.750	2.950					
		4,5 m	kg	*1.950	*1.950		*4.700	2.900	*5.250	4.700			
		3,0 m	kg	*1.950	1.800	*3.350	1.900	*5.100	2.800	*6.700	4.350		
		1,5 m	kg	*2.050	1.700	*4.150	1.850	*5.400	2.650	*7.500	4.050		
		0,0 m	kg	*2.300	1.800	*3.450	1.850	*5.400	2.550	*7.450	3.900		
	2,5 m	-1,5 m	kg	*2.750	2.000			*4.850	2.500	*6.650	3.850	*6.900	*6.900
		-3,0 m	kg	*2.900	2.500			*3.200	2.600	*5.050	3.900	*6.550	*6.550
		7,5 m	kg	*1.800	*1.800								
		6,0 m	kg	*1.600	*1.600			*3.200	2.950				
		4,5 m	kg	*1.550	*1.550	*2.000	1.950	*4.100	2.900				
		3,0 m	kg	*1.600	*1.600	*3.300	1.900	*4.900	2.800	*6.400	4.450	*10.050	*8.550
3,0 m	1,5 m	kg	*1.700	1.600	*4.150	1.850	*5.300	2.650	*7.350	4.100			
	0,0 m	kg	*1.950	1.650	*4.050	1.800	*5.400	2.550	*7.350	3.900	*4.400	*4.400	
	-1,5 m	kg	*2.400	1.850			*5.050	2.500	*6.950	3.850	*7.100	*7.100	
	-3,0 m	kg	*3.150	2.250			*3.850	2.550	*5.550	3.900	*7.550	7.500	
	7,5 m	kg	*1.450	*1.450			*2.350	*2.350					
	6,0 m	kg	*1.300	*1.300	*1.450	*1.450	*2.900	2.800					

MONO BOOM

Arm length	A	⊗		7,5 m		6,0 m		4,5 m		3,0 m			
		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		
B		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		
 <p>Outrigger + blade</p>	2,1 m	7,5 m	kg	*2.450	*2.450								
		6,0 m	kg	*2.100	*2.100		*3.750	*3.750					
		4,5 m	kg	*1.950	*1.950		*4.700	3.800	*5.250	*5.250			
		3,0 m	kg	*1.950	*1.950	*3.350	2.550	*5.100	3.700	*6.700	5.800		
		1,5 m	kg	*2.050	*2.050	*4.150	2.500	*5.400	3.550	*7.500	5.500		
		0,0 m	kg	*2.300	*2.300	*3.450	2.450	*5.400	3.450	*7.450	5.300		
		-1,5 m	kg	*2.750	2.700			*4.850	3.400	*6.650	5.250	*6.900	*6.900
		-3,0 m	kg	*2.900	*2.900			*3.200	*3.200	*5.050	*5.050	*6.550	*6.550
		2,5 m	7,5 m	kg	*1.800	*1.800			*3.200	*3.200			
	6,0 m		kg	*1.600	*1.600			*4.100	3.850				
	4,5 m		kg	*1.550	*1.550	*2.000	*2.000	*4.900	3.700	*6.400	5.900	*10.050	*10.050
	3,0 m		kg	*1.600	*1.600	*3.300	2.550	*5.300	3.550	*7.350	5.550		
	1,5 m		kg	*1.700	*1.700	*4.150	2.500	*5.300	3.550	*7.350	5.550		
	0,0 m		kg	*1.950	*1.950	*4.050	2.450	*5.400	3.450	*7.550	5.350	*4.400	*4.400
	-1,5 m		kg	*2.400	*2.400			*5.050	3.400	*6.950	5.250	*7.100	*7.100
	-3,0 m		kg	*3.150	3.050			*3.850	3.400	*5.550	5.300	*7.550	*7.550
	3,0 m		7,5 m	kg	*1.450	*1.450			*2.350	*2.350			
		6,0 m	kg	*1.300	*1.300	*1.450	*1.450	*2.900	*2.900				
		4,5 m	kg	*1.200	*1.200	*2.700	2.600	*3.250	*3.250				
		3,0 m	kg	*1.200	*1.200	*3.350	2.500	*4.350	3.700	*5.450	*5.450		
		1,5 m	kg	*1.300	*1.300	*4.050	2.450	*5.050	3.500	*6.900	5.500		
		0,0 m	kg	*1.450	*1.450	*4.050	2.350	*5.300	3.350	*7.400	6.450	*4.050	*4.050
		-1,5 m	kg	*1.700	*1.700	*3.700	2.350	*5.100	3.300	*7.100	5.150	*5.950	*5.950
		-3,0 m	kg	*2.200	*2.200			*4.250	3.300	*6.000	5.150	*8.550	*8.550
 <p>Outrigger front + rear</p>		2,1 m	7,5 m	kg	*2.450	*2.450							
	6,0 m		kg	*2.100	*2.100		*3.750	*3.750					
	4,5 m		kg	*1.950	*1.950		*4.700	4.550	*5.250	*5.250			
	3,0 m		kg	*1.950	*1.950	*3.350	3.050	*5.100	4.400	*6.700	*6.700		
	1,5 m		kg	*2.050	*2.050	*4.150	3.000	*5.400	4.250	*7.500	6.700		
	0,0 m		kg	*2.300	*2.300	*3.450	2.950	*5.400	4.150	*7.450	6.500		
	-1,5 m		kg	*2.750	*2.750			*4.850	4.100	*6.650	6.450	*6.900	*6.900
	-3,0 m		kg	*2.900	*2.900			*3.200	*3.200	*5.050	*5.050	*6.550	*6.550
	2,5 m		7,5 m	kg	*1.800	*1.800			*3.200	*3.200			
		6,0 m	kg	*1.600	*1.600			*4.100	*4.100				
		4,5 m	kg	*1.550	*1.550	*2.000	*2.000	*4.900	4.400	*6.400	*6.400	*10.050	*10.050
		3,0 m	kg	*1.600	*1.600	*3.300	3.050	*4.900	4.400	*6.400	*6.400	*10.050	*10.050
		1,5 m	kg	*1.700	*1.700	*4.150	3.000	*5.300	4.250	*7.350	6.750		
		0,0 m	kg	*1.950	*1.950	*4.050	2.950	*5.400	4.150	*7.550	6.550	*4.400	*4.400
		-1,5 m	kg	*2.400	*2.400			*5.050	4.100	*6.950	6.450	*7.100	*7.100
		-3,0 m	kg	*3.150	*3.150			*3.850	*3.850	*5.550	*5.550	*7.550	*7.550
		3,0 m	7,5 m	kg	*1.450	*1.450			*2.350	*2.350			
	6,0 m		kg	*1.300	*1.300	*1.450	*1.450	*2.900	*2.900				
	4,5 m		kg	*1.200	*1.200	*2.700	*2.700	*3.250	*3.250				
	3,0 m		kg	*1.200	*1.200	*3.350	3.050	*4.350	*4.350	*5.450	*5.450		
	1,5 m		kg	*1.300	*1.300	*4.050	2.950	*5.050	4.250	*6.900	6.700		
	0,0 m		kg	*1.450	*1.450	*4.050	2.850	*5.300	4.100	*7.400	6.450	*4.050	*4.050
	-1,5 m		kg	*1.700	*1.700	*3.700	2.850	*5.100	4.000	*7.100	6.350	*5.950	*5.950
	-3,0 m		kg	*2.200	*2.200			*4.250	4.000	*6.000	*6.000	*8.550	*8.550



- A – Reach from swing center
- B – Bucket hook height
- C – Lifting capacities, including bucket (495 kg), bucket linkage (120 kg) and bucket cylinder (109 kg)




- ⊗ – Rating over front
- ⊗ – Rating over side
- ⊗ – Rating at maximum reach


When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

* Load is limited by hydraulic capacity rather than tipping.
Ratings are based on SAE Standard No. J1097.
Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

LIFTING CAPACITY

TWO-PIECE BOOM

Arm length	A	B	7,5 m		6,0 m		4,5 m		3,0 m	
			Rating over front	Rating over side	Rating over front	Rating over side	Rating over front	Rating over side	Rating over front	Rating over side
 Without stabilizer	2,1 m	7,5 m	kg 2.300	*2.300			*3.650	*3.650		
		6,0 m	kg 1.900	*1.900		*3.250 2.200	*4.200 3.700			
		4,5 m	kg 1.800	1.500		*4.550 2.150	*5.100 3.600	*5.000	*5.000	
		3,0 m	kg 1.800	1.300	*2.400 1.350	*5.300 2.050	*6.900 3.300			
		1,5 m	kg 1.900	1.250	*3.250 1.300	*5.700 1.950	*7.900 3.050			
	0,0 m	kg 2.100	1.300		*5.800 1.850	*8.050 2.900				
	-1,5 m	kg 2.600	1.450		*5.300 1.850	*7.400 2.850	*7.400	5.450		
	-3,0 m	kg				*5.700 2.900				
	2,5 m	7,5 m	kg 1.750	*1.750			*3.350	*3.350		
		6,0 m	kg 1.500	*1.500		*3.150 2.200	*3.450	*3.450		
4,5 m		kg 1.400	1.300	*1.750 1.350	*3.850 2.150	*4.000 3.600	*3.500	*3.500		
3,0 m		kg 1.400	1.150	*3.150 1.300	*5.000 2.050	*6.450 3.350				
1,5 m		kg 1.500	1.100	*3.900 1.250	*5.500 1.900	*7.550 3.000				
3,0 m	0,0 m	kg 1.650	1.100	*3.850 1.200	*5.700 1.800	*8.000 2.850	*4.050	*4.050		
	-1,5 m	kg 2.000	1.250		*5.400 1.750	*7.550 2.750	*6.900	5.300		
	-3,0 m	kg			*4.150 1.800	*6.150 2.800				
	7,5 m	kg 1.400	*1.400		*2.050	*2.050	*2.850	*2.850		
	6,0 m	kg 1.200	*1.200		*2.800 2.250	*2.700	*2.700			
 Front or rear blade	2,1 m	7,5 m	kg 2.300	*2300			*3650	*3650		
		6,0 m	kg 1.900	*1900		*3250 2.300	*4200 3.900			
		4,5 m	kg 1.800	1.600		*4550 2.300	*5100 3.750	*5000	*5000	
		3,0 m	kg 1.800	1.400	*2400 1.450	*5300 2.200	*6900 3.500			
		1,5 m	kg 1.900	1.350	*3250 1.400	*5700 2.050	*7900 3.200			
	0,0 m	kg 2.100	1.400		*5800 2.000	*8050 3.050				
	-1,5 m	kg 2.600	1.550		*5300 1.950	*7400 3.050	*7400	5.750		
	-3,0 m	kg				*5700 3.100				
	2,5 m	7,5 m	kg 1.750	*1750			*3350	*3350		
		6,0 m	kg 1.500	*1500		*3150 2.300	*3450	*3450		
4,5 m		kg 1.400	1.400	*1750 1.450	*3850 2.250	*4000 3.750	*3500	*3500		
3,0 m		kg 1.400	1.200	*3150 1.400	*5000 2.150	*6450 3.500				
1,5 m		kg 1.500	1.150	*3900 1.350	*5500 2.000	*7550 3.200				
3,0 m	0,0 m	kg 1.650	1.200	*3850 1.300	*5700 1.900	*8000 3.000	*4050	*4050		
	-1,5 m	kg 2.000	1.350		*5400 1.850	*7550 2.900	*6900	5.500		
	-3,0 m	kg			*4150 1.900	*6150 2.950				
	7,5 m	kg 1.400	*1400		*2050	*2050	*2850	*2850		
	6,0 m	kg 1.200	*1200		*2800 2.400	*2700	*2700			
 Rear outrigger	2,1 m	7,5 m	kg 2.300	*2.300			*3.650	*3.650		
		6,0 m	kg 1.900	*1.900		*3.250 2.350	*4.200 3.950			
		4,5 m	kg 1.800	1.600		*4.550 2.300	*5.100 3.800	*5.000	*5.000	
		3,0 m	kg 1.800	1.400	*2.400 1.450	*5.300 2.200	*6.900 3.550			
		1,5 m	kg 1.900	1.350	*3.250 1.400	*5.700 2.100	*7.900 3.250			
	0,0 m	kg 2.100	1.400		*5.800 2.000	*8.050 3.100				
	-1,5 m	kg 2.600	1.600		*5.300 2.000	*7.400 3.100	*7.400	5.850		
	-3,0 m	kg				*5.700 3.150				
	2,5 m	7,5 m	kg 1.750	*1.750			*3.350	*3.350		
		6,0 m	kg 1.500	*1.500		*3.150 2.350	*3.450	*3.450		
4,5 m		kg 1.400	*1.400	*1.750 1.450	*3.850 2.300	*4.000 3.800	*3.500	*3.500		
3,0 m		kg 1.400	1.250	*3.150 1.450	*5.000 2.200	*6.450 3.550				
1,5 m		kg 1.500	1.200	*3.900 1.400	*5.500 2.050	*7.550 3.250				
3,0 m	0,0 m	kg 1.650	1.200	*3.850 1.350	*5.700 1.950	*8.000 3.050	*4.050	*4.050		
	-1,5 m	kg 2.000	1.400		*5.400 1.900	*7.550 2.950	*6.900	5.650		
	-3,0 m	kg			*4.150 1.950	*6.150 3.000				
	7,5 m	kg 1.400	*1.400		*2.050	*2.050	*2.850	*2.850		
	6,0 m	kg 1.200	*1.200		*2.800 2.400	*2.700	*2.700			





- A – Reach from swing center
- B – Bucket hook height
- C – Lifting capacities, including bucket (495 kg), bucket linkage (120 kg) and bucket cylinder (109 kg)


- Rating over front
- Rating over side
- Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

* Load is limited by hydraulic capacity rather than tipping.
Ratings are based on SAE Standard No. J1097.
Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

TWO-PIECE BOOM

Arm length	A	⊗		7,5 m		6,0 m		4,5 m		3,0 m			
		⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗		
 Outrigger + blade	2,1 m	7,5 m	kg	2.300	*2.300			*3.650	*3.650				
		6,0 m	kg	1.900	*1.900		*3.250	2.450	*4.200	4.100			
		4,5 m	kg	1.800	1.700		*4.550	2.450	*5.100	3.950	*5.000	*5.000	
		3,0 m	kg	1.800	1.500	*2.400	1.550	*5.300	2.350	*6.900	3.700		
		1,5 m	kg	1.900	1.450	3.250	1.500	*5.700	2.200	*7.900	3.450		
		0,0 m	kg	2.100	1.500			*5.800	2.150	*8.050	3.300		
	2,5 m	-1,5 m	kg	2.600	1.700			*5.300	2.100	*7.400	3.250	*7.400	6.100
		-3,0 m	kg							*5.700	3.300		
		7,5 m	kg	1.750	*1.750					*3.350	*3.350		
		6,0 m	kg	1.500	*1.500			*3.150	2.450	*3.450	*3.450		
		4,5 m	kg	1.400	*1.400	*1.750	1.550	*3.850	2.400	*4.000	4.000	*3.500	*3.500
		3,0 m	kg	1.400	1.350	*3.150	1.500	*5.000	2.300	*6.450	3.700		
3,0 m	1,5 m	kg	1.500	1.250	*3.900	1.450	*5.500	2.150	*7.550	3.400			
	0,0 m	kg	1.650	1.300	*3.850	1.400	*5.700	2.050	*8.000	3.200	*4.050	*4.050	
	-1,5 m	kg	2.000	1.450			*5.400	2.000	*7.550	3.150	*6.900	5.950	
	-3,0 m	kg					*4.150	2.050	*6.150	3.200			
	7,5 m	kg	1.400	*1.400			*2.050	*2.050	*2.850	*2.850			
	6,0 m	kg	1.200	*1.200			*2.800	2.550	*2.700	*2.700			
3,0 m	4,5 m	kg	1.100	*1.100	*2.500	1.600	*3.150	2.450	*2.950	*2.950			
	3,0 m	kg	1.100	*1.100	*3.150	1.550	*4.150	2.350	*5.050	3.800			
	1,5 m	kg	1.150	1.100	*3.900	1.450	*5.300	2.200	*7.200	3.450			
	0,0 m	kg	1.300	1.150	*4.350	1.400	*5.650	2.050	*7.900	3.250	*4.250	*4.250	
	-1,5 m	kg	1.550	1.300	*3.700	1.400	*5.550	2.000	*7.750	3.100	*6.250	5.900	
	-3,0 m	kg	2.050	1.550			*4.700	2.000	*6.750	3.100	*9.800	6.000	
 Outrigger front + rear	2,1 m	7,5 m	kg	2.300	*2.300			*3.650	*3.650				
		6,0 m	kg	1.900	*1.900		*3.250	2.500	*4.200	4.150			
		4,5 m	kg	1.800	1.750		*4.550	2.450	*5.100	4.000	*5.000	*5.000	
		3,0 m	kg	1.800	1.550	*2.400	1.550	*5.300	2.350	*6.900	3.750		
		1,5 m	kg	1.900	1.450	*3.250	1.550	*5.700	2.250	7.900	3.500		
		0,0 m	kg	2.100	1.500			*5.800	2.150	*8.050	3.350		
	2,5 m	-1,5 m	kg	2.600	1.700			*5.300	2.150	*7.400	3.300	*7.400	6.200
		-3,0 m	kg							*5.700	3.350		
		7,5 m	kg	1.750	*1.750					*3.350	*3.350		
		6,0 m	kg	1.500	*1.500			*3.150	2.500	*3.450	*3.450		
		4,5 m	kg	1.400	*1.400	*1.750	1.550	*3.850	2.450	*4.000	*4.000	*3.500	*3.500
		3,0 m	kg	1.400	1.350	*3.150	1.550	*5.000	2.350	*6.450	3.750		
3,0 m	1,5 m	kg	1.500	1.300	*3.900	1.500	*5.500	2.200	*7.550	3.450			
	0,0 m	kg	1.650	1.350	*3.850	1.450	*5.700	2.100	*8.000	3.250	*4.050	4.050	
	-1,5 m	kg	2.000	1.500			*5.400	2.050	*7.550	3.200	*6.900	6.050	
	-3,0 m	kg					*4.150	2.100	*6.150	3.250			
	7,5 m	kg	1.400	*1.400			*2.050	*2.050	*2.850	*2.850			
	6,0 m	kg	1.200	*1.200			*2.800	2.550	*2.700	*2.700			
3,0 m	4,5 m	kg	1.100	*1.100	*2.500	1.600	*3.150	2.500	*2.950	*2.950			
	3,0 m	kg	1.100	*1.100	*3.150	1.550	*4.150	2.400	*5.050	3.850			
	1,5 m	kg	1.150	1.150	*3.900	1.500	*5.300	2.250	*7.200	3.500			
	0,0 m	kg	1.300	1.150	*4.350	1.450	*5.650	2.100	*7.900	3.300	*4.250	*4.250	
	-1,5 m	kg	1.550	1.300	*3.700	1.400	*5.550	2.050	*7.750	3.150	*6.250	6.000	
	-3,0 m	kg	2.050	1.600			*4.700	2.050	*6.750	3.150	9.800	6.050	



- A – Reach from swing center
- B – Bucket hook height
- C – Lifting capacities, including bucket (495 kg), bucket linkage (120 kg) and bucket cylinder (109 kg)
- ⊗ – Rating over front
- ⊗ – Rating over side
- ⊗ – Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

* Load is limited by hydraulic capacity rather than tipping.
Ratings are based on SAE Standard No. J1097.
Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

HYDRAULIC WHEELED EXCAVATOR

STANDARD EQUIPMENT

- Komatsu SAA4D107E-1, 97,0 kW turbocharged common rail direct injection diesel engine, EU Stage IIIA compliant
- Double element type air cleaner with dust indicator and auto dust evacuator
- Suction type cooling fan
- Automatic fuel line de-aeration
- Engine key stop
- Engine ignition can be password secured on request
- Engine overheat prevention system
- Auto-deceleration function
- Automatic engine warm-up system
- Alternator 24 V/60 A
- Batteries 2 × 12 V/120 Ah
- Starter motor 24 V/4,5 kW
- Standard counterweight
- Electronic closed-centre load sensing (E-CLSS) hydraulic system (HydrauMind)
- Pump and engine mutual control (PEMC) system
- Multi-function colour monitor with equipment management monitoring system (EMMS)
- 4-working mode selection system; Power mode, economy mode, breaker mode and lifting mode
- PowerMax function
- Adjustable PPC wrist control levers with 3 button control and proportional attachment control slider for arm, boom, bucket and swing
- Additional hydraulic circuit (HCU-B)
- Fully automatic 3-speed transmission driving through front and rear planetary axles
- Orbitrol type hydraulic steering acting on front wheels
- Oscilating front axle (10°) with automatic and manual cylinder locking
- Dual circuit hydraulic brakes with outboard wet multi-disc service brakes
- Spring actuated park brake (hydraulic release) incorporated into transmission
- SpaceCab™, highly pressurized and tightly sealed viscous mounted cab with tinted safety glass windows, pull-up type front window with locking device, heated rear window, removable lower window, front window wiper with intermittent feature, sun blind roller, magazine rack behind seat, 12 V power supply, cigarette lighter, ashtray, floor mat, machine cab handrails, suspension seat with tiltable left hand console, automatic weight adjustment, adjustable arm rests and retractable seat belt, hot and cool box
- KOMTRAX™ Komatsu Tracking System
- Parts book and operator manual
- Lockable fuel cap and covers
- Fuel supply pump
- Overload warning device
- Boom safety valves
- Dozer blade cylinder guard
- Climate control/Air conditioning
- Centralised greasing system
- Radio cassette preparation
- Toolkit and spare parts for first service
- Single chassis tool box
- Standard colour scheme and decals

OPTIONAL EQUIPMENT

- Mono boom
- Two-piece boom
- 2,1 m; 2,5 m; 3,0 m arms
- Additional hydraulic circuit (HCU-C)
- Parallel blade (front and/or rear)
- 2 or 4 outriggers with cylinder protection (front and/or rear)
- Four sets of tyre and rim (twin tyre) 10.00-20 14 PR
- Four sets of tyre and rim (single tyre) 18.00-19.5
- Nokian twin tyres 10-20
- Fenders
- Engine pre-heater (diesel fueled), available with command call
- Clean fix fan (with turning blades for cleaning function)
- Poor fuel kit
- Automatic greasing system
- Quick-coupler piping
- Komatsu quick couplers
- Komatsu buckets
- Transmission guard
- Clamshell grip bar
- Adjust cylinder safety valve
- Arm cylinder safety valve
- Heated air suspension seat
- Radio-cassette
- Lower wiper
- OPG Level II front guard (FOPS)
- OPG Level II top guard (FOPS)
- Additional RH boom lamp
- Beacon + rear facing cab lamp
- 1 or 2 additional beacons on counterweight
- Additional large capacity cab roof lights (2)
- Xenon working lights
- Optical back-up alarm (blue or white strobe light)
- Super tone horn (no road approval)
- Back-up alarm (white noise version)
- Bio oil
- Rain visor (not for use with OPG)
- Additional chassis tool box
- Customized paint



Komatsu Europe International NV

Mechelsesteenweg 586
 B-1800 VILVOORDE (BELGIUM)
 Tel. +32-2-255 24 11
 Fax +32-2-252 19 81
 www.komatsu.eu